



(19)

Europäisches Patentamt

European Patent Office

Office européen des brevets



(11)

EP 0 928 907 A1

(12)

EUROPEAN PATENT APPLICATION

(43) Date of publication:

14.07.1999 Bulletin 1999/28

(51) Int Cl.⁶ F16G 3/10

(21) Application number: 99100191.8

(22) Date of filing: 07.01.1999

(84) Designated Contracting States:

AT BE CH CY DE DK ES FI FR GB GR IE IT LI LU
MC NL PT SE

Designated Extension States:

AL LT LV MK RO SI

(30) Priority: 08.01.1998 US 463698

(71) Applicant: Xerox Corporation

Rochester, New York 14644 (US)

(72) Inventors:

• Yu, Robert C. U.

Webster, NY 14580 (US)

• Hammond, William A.

Rochester, NY 14620 (US)

• Schleuter, Edward L. Jr.

Rochester, NY 14612 (US)

• Thornton, Constance J.

Ontario, NY 14519 (US)

(74) Representative: Grünecker, Kinkeldey,
Stockmair & Schwanhäusser Anwaltssozietät
Maximilianstrasse 58
80538 München (DE)

(54) Process and apparatus for producing an endless seamed belt

(57) A novel method and apparatus for producing an endless flexible seamed belt (10) using templates is disclosed. A first form of the template is a mask template with a template aperture in the form of a puzzle cut pattern to be used in combination with an excimer laser. The template is placed between the excimer laser source and the belt material to be cut. As the excimer laser traverses the width of the belt, the laser forms a puzzle cut pattern on the belt. A second form of the template is a punch and die having patterned edges in the form of a puzzle cut pattern with extremely small nodes and kerfs. The cutting tolerances of the patterned edges

make it necessary to fix the punch with respect to the die so that there is no misalignment of the punch and die between cutting operations. This is accomplished by resiliently fixing the punch to the die, rather than having the punch attached to the force generating assembly as in normal punch and die assemblies. Belt material is positioned between a stock gap between the punch and die and the force generating assembly is activated to provide the cutting force. Once the belt material is cut, the cutting force is removed and the force generating assembly returns to its retracted position. Both types of templates result in very clean cuts without deformation or distortion.

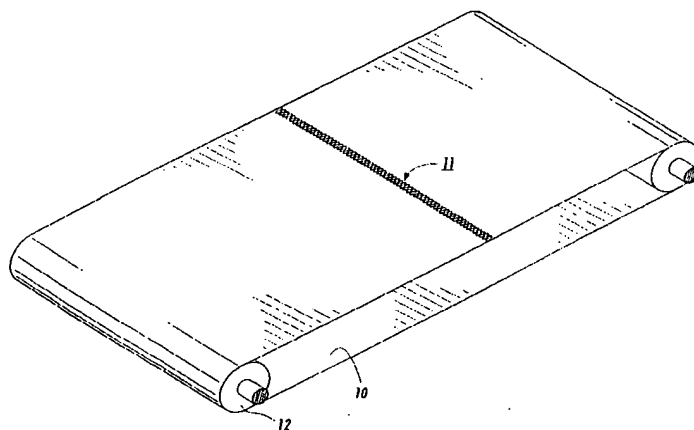


FIG. 1

Description

[0001] This invention relates generally to a process and apparatus for producing an endless seamed flexible belt, and more particularly concerns forming the ends of the flexible belt in a puzzle cut pattern which interlock to form a very low profile seam.

[0002] Initially, flexible belts were fabricated by taking two ends of a web material and fastening them together by a variety of techniques such as sewing, wiring, stapling, providing adhesive joints, etc. While such joined or seamed belts are suitable for many applications, such as the delivery of rotary motion from a source such as a motor, to implement a device such as a saw blade, they are not as satisfactory in many of the more sophisticated applications of belt technology in common practice today. In the technology of the current day, many applications of belts require much more sophisticated qualities and utilities, and in particular, for such special applications as in electrostatographic imaging apparatus and processes using a flexible photoreceptor belt or a flexible electroreceptor belt, in combination with either a intermediate transfer member, or image transport devices, or fusing member, or transfix devices in the flexible belt form. It is ideal to provide a seamless flexible belt whereby there is no seam in the belt which mechanically interferes with any operation that the belt performs or any operation that may be performed on the belt. While this is ideal, the manufacture of seamless belts requires rather sophisticated manufacturing processes which are expensive and are particularly more sophisticated, difficult and much more expensive for the larger belts. As a result, various attempts have been made to provide seamed belts which can be used in these processes. Previous attempts to manufacture seamed belts have largely relied on belts where the two opposite ends of a rectangularly cut sheet of the belt material have been lapped or overlapped and ultrasonically welded to form the seam, or have butted against one another and then fastened mechanically by heat or other means of adhesion such as by the use of an adhesive.

[0003] The belts formed according to the typical butting technique while satisfactory for many purposes are limited in bonding, strength and flexibility because of the limited contact area formed by merely butting the two ends of the belt material. Furthermore, belts formed according to the lapping or overlapping and ultrasonic welding technique have excessive seam thickness which provides a bump or other discontinuity in the belt surface leading to a significant height differential over the adjacent portions of the belt, of 0.003 inches or more depending on the belt thickness, which leads to performance failure in many applications. In electrostatographic imaging process utilizing an overlapping ultrasonically welded seamed belt, two most severe problems that the imaging belt has encountered during the imaging and cleaning processes are, for example, one involves cleaning the imaging belt of residual toner after transfer of the toner image due to the excess in seam height, while the other is the dynamic fatigue seam cracking as a result of large induced bending stress when seam bends and flexes over various belt support rollers of the belt module caused by the increase in seam thickness. Therefore, with a bump, crack or other discontinuity in the seam area of the belt, the cleaning function of a blade is affected which allows toner to pass under the blade and not be effectively cleaned off from the imaging belt surface, since intimate contact between the imaging belt and the cleaning blade is not maintained. A crack in the seam has also been seen to become a site that collects and traps toners which are eventually spewed out to the imaging zones of the imaging belt surface causing copy printout defects. Furthermore, seams having differential heights may, when subjected to repeated striking by cleaning blades, cause the untransferred, residual toner to be trapped in the irregular surface morphology of the seam. As a consequence, an electrostatographic imaging belt which is repeatedly subjected to this striking action, during imaging and cleaning processes, tends to delaminate at the seam when the seam is subjected to constant battering by the cleaning blade. Since the severe mechanical interaction between the cleaning blade and the seam also causes blade wear problem, the result often observed is that both the cleaning life of the blade and the overall life of the imaging belt under a service environment can be greatly diminished as well as degrading the copy print-out quality. In addition, the mechanical striking of the cleaning blade over the excessive seam height has also been found to give rise to vibrational disturbance in imaging development zone which affects the toner image formation on the belt and degrades resolution and transfer of the toner image to a receiving copy sheet. Moreover, the discontinuity or seam bump in such a belt may result in inaccurate image registration during development, inaccurate belt tracking and overall deterioration of motion quality, as a result of the translating vibrations. This is particularly prevalent in those applications requiring the application of multiple color layers of liquid or dry developer on an imaging belt surface to form the colored toner images, which are subsequently transferred to the final receiving copy sheet. Another disadvantage is that the presence of the discontinuity in belt thickness at the seam area has also been seen to reduce the flex life and continuity of strength of the belt during dynamic fatigue belt cycling when belt bends over various belt support module rollers.

[0004] Therefore, for all practical application purposes and prolonging a belt's service life, it is desired to provide a seam height differential between the seam and the unseamed adjacent portions less than 0.001 inch or not to add more than 20 percent of the unseamed parent material thickening.

[0005] It has been shown that an endless seamed belt, having very small seam height differential, can be formed with patterned interlocked ends, the pattern of the ends being formed by using a laser or a die to cut the pattern and the patterned cut ends being brought together to interlock to form a seam. In experiments the patterned seams were

first generated using a CO₂ laser programmed to make various patterned node sizes and spacings. Although the laser was an excellent tool for providing the cut pattern geometries and conditions, however it was a costly and timely process and an inappropriate process for manufacturing seams for large volumes of belt production implementation because the focused CO₂ laser has a fine beam size that has to make hundreds of bends, twists, and turns in order to produce the small node pattern cuts as the laser traverses across the whole wide of the imaging web. Since the CO₂ laser is a heat laser, the generated heat that melts and cuts the imaging web material has been found to cause heat induced material shrinkage of the cut patterns. Alternatively, a 1 inch length punch press die was designed to cut small belt seam samples for testing purposes. The die cut is much faster and cleaner than the CO₂ laser cut and the die cut was determined to be the preferred method to be used in the patterned seam belt manufacturing process; unfortunately, the mechanical force employed for cutting the imaging web is also seen to cause the material to develop permanent deformation. To yield the desirable seam cut pattern, the size of approximately 0.5mm and the spacings of approximately 25 microns for the nodes, it requires very accurate cutting by a die. Such a requirement has been found to be impossible for a die to maintain and provide the demanding tolerances for the width of an operational belt seam.

[0006] In essence, both the CO₂ laser and mechanical die cutting methodologies have their respective undesirable shortcoming of causing imaging material dimensional change at the vicinity of the cut patterns, which have a precise shape tolerance to yield the perfect seam mating result. Therefore, there is an urgent need at present to develop a mechanically robust thin seam design and its preparation method for imaging belts application.

[0007] U.S. Patent No. 1,303,687 teaches forming a container from a body blank with the ends dovetailed together and a covering sheet which extends beyond the end of the body and has its extending portion secured down, overlapping the dovetail joint to secure and finish the container. In forming the container, the body blank is wrapped around a forming mandrel of the desired shape and the two dovetail ends are interlocked. At the same time the extending ends of the covering sheet, which are provided with adhesive, are stuck down overlapping the joint.

[0008] U.S. Patent No. 2,461,859 teaches an endless flexible belt with a patterned dovetail joint. A single die cut may cut both ends of the patterned dovetail joint at the same time. The ends of the belt are cut to form a male and female end with a plurality of spaced dovetailed tabs, the female end fitting into the male end and the dovetailed tabs interlocking with each other. An adhesive may be used at the belt joint.

[0009] U.S. Patent No. 2,792,318 discloses forming splice joints in fibrous material, each joint being cut so that an interlocking tongue and groove pattern is formed. The tongues and grooves may be different shapes. In the finished product, the joints are oriented at a diagonal with respect to the sides. A coating material may be used to maintain the interfitted tongues and grooves, however, it is the interlocking connection of the tongues and grooves that provides the tensile strength of the joint.

[0010] U.S. Patent Nos. 4,878,985 and 5,286,586 disclose fabricating thin flexible endless belts used in electrophotographic printing systems. The patents teach overlapping the ends of the belt and welding the ends together to form an endless belt.

[0011] U.S. Patent 4,624,126 teaches a hydraulic press with a cylinder arrangement for equalizing forces in the event of unequal loading of the press.

[0012] U.S. Patent 5,688,355 discloses fabricating a flexible belt by removing some of the layers on the belt ends by ablation with a masked excimer laser beam. The ends are overlapped to form a substantially thin flat surface and fused together to form the endless belt.

[0013] U.S. Patent Application Serial No. 08/721,418 entitled "Process and Apparatus for Producing an endless Seamed Belt" by Schlueter, Jr. et al., filed September 26, 1996 and assigned to the same assignee as the present invention, teaches producing an endless flexible belt using a punch and die. The punch and die have patterned edges in the form of a puzzle cut pattern with extremely small nodes and kerfs. The cutting tolerances of the patterned edges make it necessary to fix the punch with respect to the die so that there is no misalignment of the punch and die between cutting operations.

SUMMARY OF THE INVENTION

[0014] It is an object of the present invention to overcome the above shortfalls and provide a mechanically robust thin seam design for flexible belt application.

[0015] One aspect of the object of the present invention is solved by a method according to claim 1 for producing an endless flexible seamed belt from belt material stock including positioning a template above the belt material stock and applying a cutting force to the template to form a first patterned end and a second patterned end on the belt stock material. The cutting force is removed resulting the first and second patterned ends of the belt are cut in a puzzle cut pattern with mutually mating elements which fit together to form a seam when joined mechanically to enable the endless flexible seamed belt to essentially function as an endless belt having a substantially uniform thickness.

[0016] In a preferred embodiment concerning this aspect of the present invention the step of applying the cutting force further comprises:

forming a first edge on the belt with a first punch cutting edge interacting with a first die cutting edge; and forming a second edge on the belt with a second punch cutting edge interacting with a second die cutting edge, wherein the length of the first and second edges determine the length of the belt.

5 [0017] In a further preferred embodiment concerning this aspect of the present invention the step of removing the cutting force further comprises:

forming a gap between the force generator assembly and the force receiving surface of the punch assembly which allows the force generator assembly to move a greater distance than the force receiving surface.

10 [0018] In a further preferred embodiment concerning this aspect of the present invention the process further comprises:

fixing the punch assembly to the die assembly to limit the movement of the punch with respect to the die.

In a further preferred embodiment concerning this aspect of the present invention the punch moves from about .05 inches to about .2 inches with respect to the die.

15 [0019] A second aspect of the present invention is an apparatus according to claim 6 for producing an endless flexible seamed belt from belt material stock including a template with a puzzle cut pattern formed thereon positioned above the belt material stock and a cutting force applied to the template to form a first patterned end and a second patterned end on the belt stock material, wherein the first and second patterned ends of the belt are cut in a puzzle cut pattern with mutually mating elements which fit together to form a seam. When the ends are joined mechanically a flexible seamed belt which essentially functions as an endless belt having a substantially uniform thickness is formed.

20 In a preferred embodiment concerning the second aspect of the present invention the apparatus further comprises:

a first edge formed on the belt with a first punch cutting edge interacting with a first die cutting edge; and a second edge formed on the belt with a second punch cutting edge interacting with a second die cutting edge, wherein the length of the first and second edges determine the length of the belt.

25 In a further preferred embodiment concerning the second aspect of the present invention the apparatus further comprises:

30 a force generator surface on the force generating assembly that transmits the force of the force generating assembly to the punch assembly;

a force receiving surface on the punch assembly for receiving the force of the force generating assembly; and a gap formed between the force generator surface and the force receiving surface when the force generating assembly is in a retracted position so that the punch assembly is disconnected from the force generating assembly.

35 In a further preferred embodiment concerning the second aspect of the present invention the apparatus further comprises:

a punch return assembly that resiliently fixes the punch assembly to the die assembly.

40 In a further preferred embodiment concerning the second aspect of the present invention the punch return assembly comprises:

at least two bolts connecting the die and punch assemblies together; and at least two springs, one spring mounted on each bolt, the springs biasing the punch towards the force generator and the bolts limiting the movement of the punch in the direction towards the force generator so that a space from about .05 inches to .2 inches is formed between the punch and die when the cutting force is removed.

45 [0020] A third aspect of the present invention is drawn to an endless flexible seamed belt according to claim 9 made by an apparatus including a template with a puzzle cut pattern formed thereon positioned above the belt material stock and a cutting force applied to the template to form a first patterned end and a second patterned end on the belt stock material. The first and second patterned ends of the belt are cut in a puzzle cut pattern with mutually mating elements which fit together to form a seam when joined mechanically to enable the flexible seamed belt to essentially function as an endless belt having a substantially uniform thickness.

50 In a preferred embodiment concerning the third aspect of the present invention the template is a punch assembly including a punch with a first punch cutting end having a first punch pattern and a second punch cutting end having a second punch cutting pattern;

55 a die assembly including a die with a first die cutting end having a first die pattern which is complementary to the first punch pattern and a second die pattern which is complementary to the second punch pattern; and the cutting force is generated by a force generating assembly in a cutting operation in which the punch and die

cut the belt material.

[0021] In a manufacturing mode, it is desirable to have a fast and accurate method of forming the puzzle cut seam design. Using a template having the desired puzzle-cut pattern in combination with an excimer laser for cutting the flexible belt material and creating the pattern is much quicker and cleaner without the heat induced material deformation problem as that seen associated with using a CO₂ laser to form the puzzle cut seam. Alternatively, a template in the form of a punch and die is also a quick and clean way to cut the flexible belt material. Employing the excimer laser cutting and punch and die cutting are cleaner than the laser cut due to the fact that the CO₂ laser melts the belt material, which is a particular problem in a multi-layered belt. Having a clean and low profile puzzle cut seam pattern is very important when the belt is used in an electrophotographic machine environment due to the stringent requirement of very small distances existing between the electrophotographic process subsystem elements and the belt surface.

BRIEF DESCRIPTION OF THE DRAWINGS

[0022] Other features of the present invention will become apparent as the following description proceeds and upon reference to the drawings, in which:

[0023] Figure 1 is an isometric representation of the flexible puzzle cut seamed belt providing a mechanically invisible and substantially equivalent seam in performance to that of a seamless belt.

[0024] Figure 2 is an enlarged view of a puzzle cut pattern used on both joining ends of the belt material to provide interlocking elements having a post portion 14 and a larger head portion 16.

[0025] Figure 3 is illustrative of an alternative configuration wherein male 18, 19 and female 21, 23 interlocking portions having curved mating elements are used in the two ends of the belt material which are joined.

[0026] Figure 4 is a further alternative embodiment wherein the interlocking elements 30, 32 form a dovetail pattern having curved mating elements.

[0027] Figure 5 is an additional alternative embodiment wherein the interlocking relationship between the puzzle cut pattern on both ends is formed from a plurality of finger joints 22, 26.

[0028] Figure 6 is a greatly exaggerated in scale representation of the seam type geometry, a very narrow kerf 20, that will be bonded by heat and pressure alone.

[0029] Figure 7 is a greatly exaggerated representation of the belt seam 11 with the kerf 20 filled with belt compatible material represented by cross hatching.

[0030] Figure 8 is a schematic representation of cutting a rectangular slot at an end of an electrophotographic imaging member web with an excimer laser using a mask template.

[0031] Figure 9 is a mask template having the desired puzzle cut pattern for the excimer laser cutting use.

[0032] Figure 10 is a front view of the die press used to form the puzzle cut belt.

[0033] Figure 11 is an exploded view of the cutting elements in the die press of Figure 10.

DETAILED DESCRIPTION OF THE INVENTION

[0034] With continued reference to the figures and additional reference to the following description the invention will be described in greater detail. The seam formed according to the present invention is one of enhanced strength, flexibility and mechanical life which is held together by the geometric relationship between the ends of the belt material, which are fastened together by a puzzle cut, meaning that the two ends interlock with one another in the manner of an ordinary puzzle and wherein the seam has voids or a kerf 20 between the surfaces of mutually mating elements, the opposite surfaces of the puzzle cut pattern being joined together to enable the seamed flexible belt to essentially function as an endless belt. The joining of the opposite surfaces of the mutually mating elements forming the seam may be either a physical joining, chemical joining or some combination of physical and chemical joining. The opposite surfaces of the puzzle cut pattern may alternatively be bound with an adhesive which is physically and chemically compatible with the belt material. Typically, this joining provides a bonding between the opposite surfaces of the mutual mating elements which provides an improved seam quality and smoothness with substantially no thickness differential between the seam and the adjacent portions of the belt thereby providing enhanced imaging, registration and control as discussed above. In this regard, it should be noted that the lower the differential in height, the faster that the belt may travel. In any case, the opposite surfaces of the puzzle cut pattern being joined together are bound with sufficient physical integrity to enable the seamed flexible belt to essentially function as an endless belt. The two ends of the seamed belt may be joined by heating such as by welding, including ultrasonic welding, arc welding and impulse welding, wherein top and bottom elements similar to those that are used to seal plastic bags have two arms which apply pressure and then the elements are heated. In the case of thermoplastic belt materials the thermoplastic nodes may be deformed by heating and may flow into the voids to form or link together and physically form the bond. As illustrated in Figure 6 a very narrow kerf between thermoplastic ends of the belt may be filled by the mere application

of heat and pressure. This is like welding the two nodes together. This technique of course is not applicable to thermoset materials.

[0035] Alternatively the two ends of the belt having the puzzle cut pattern at each end may be joined by a chemical reaction. This happens in the instance where the belt material is a thermoplastic and upon heating the thermoplastic at least softens, if not melts, and flows to fill the voids in the seam.

[0036] Another alternative is to apply an adhesive to the voids between the mutually mating elements, and in particular, to the opposite surfaces of the puzzle cut pattern. With the use of an adhesive a much wider kerf may be used than the very narrow kerf that may be used for bonding by heat and pressure only thermoplastic materials. This also permits the adhesive to wick into the void or kerf areas. In this regard, the viscosity of the adhesive is important since it's performance depends on its ability to wick into the voids or the kerf between adjacent cut pieces of the pattern. Accordingly, a relatively high viscosity adhesive will not perform as satisfactorily as a low viscosity adhesive. In addition, the surface energy of the adhesive must be compatible with the material from which the belt is fabricated so that it adequately wets and spreads in the belt seam. As previously described good adhesion is required to enable the performance requirements previously discussed with regard to comparing it to the original material. If the belt is made of a thermoplastic or thermoset material, it is quite convenient to use thermoplastic or thermoset adhesives which melt and flow at a temperature below that of the belt material but do not soften enough or flow during the belt's operation. The kerf, the distance between adjacent surfaces of the mutually mating elements of the belt ends can be built into the belt ends by way of a mechanical die or it can be built into by way of cutting with a laser pattern. If the belt material is a thermoplastic, a thermoplastic or thermoset or otherwise crosslinked adhesive may also be used and indeed may be based on the same material that the belt is fabricated from. However, if the belt material is thermosetting then a thermoplastic or thermoset adhesive may be used to fill the voids between the opposite surfaces of the puzzle cut pattern. Typically, a hot melt adhesive may be used, which is one that is solid at room temperature, however, when heated will flow. Typical thermoplastic hot melt adhesives include polyamides, urethanes, polyesters. Typical thermosetting materials include epoxies, polyimides, cyanoacrylates and urethanes. Following bonding, whether it be physical, chemical or by way of adhesive or any combination of the above, although it may not be necessary, it may be desirable to apply pressure to flatten the seam to make it as uniform as possible and control any thickness differential.

[0037] Referring to Figure 1, it should be noted that the mechanical interlocking relationship of the seam is present in a two dimensional plane when the belt is on a flat surface, whether it be horizontal or vertical. While the seam is illustrated in Figure 1 as being perpendicular to the two parallel sides of the belt it will be understood that it may be angled or slanted with respect to the parallel sides. This enables any noise generated in the system to be distributed more uniformly and the forces placed on each mating element or node to be reduced.

[0038] The endless flexible seamed belt may be made of any suitable material. Any suitable belt material may be employed. Typical materials include, photoreceptor materials which may be multilayered such as those described in U.S. Patent 4,265,990, as well as a variety of thermoplastic and thermosetting belt materials. Typical materials include polyesters, polyurethanes, polyimides, polyvinyl chloride, polyolefins such as polyethylene and polypropylene and polyamides such as nylon, polycarbonates, acrylics. In addition, elastomeric materials such as silicones, fluorocarbons such as Vitons E. I. DuPont™, EPDM and nitriles etc. For certain purposes, metallic, cloth and even paper may be used. The belt material is selected to have the appropriate physical characteristics for specific utilities such as tensile strength, Young's modulus, typically 1×10^3 to 1×10^6 , electroconductivity, typically 10^8 to 10^{11} ohm cm volume resistivity, thermal conductivity, stability, flex strength and in certain applications, such as transfix, being capable of being subjected to high temperatures. Other important characteristics of the belt material include surface energy desired low for good toner release, for example, gloss, dielectric constant and strength.

[0039] The puzzle cut pattern has been formed according to conventional shaping technique, such as by die cutting or laser cutting with commercially available lasers, such as a CO₂ laser or excimer laser. However, the use of excimer laser puzzle pattern cutting is preferred because it generates a beam of sufficient width and intensity that within an acceptable time will provide the desired cut. Following cutting by the laser beam it can be deburred and cleaned by air, ultrasonics or brushing if necessary. The puzzle cut pattern may be formed on each of the ends by a male and female punch with the belt material in between which punches out the shape. Alternatively, it could be a pattern on a wheel which rolls over the material.

[0040] It has been found that a CO₂ laser utilizing a focused heat beam is unsuitable for the precise reshaping requirements of this invention. Although a CO₂ laser beam can be small and localized, it melts or burns the material upon which is focused. Because the wavelength of a CO₂ laser is about 10.6 micrometers, which is in the far infrared region of the spectrum, the CO₂ laser beam apparently functions much like a heat radiation beam that melts and burns away the material to be removed. This is evidenced by the appearance of smoke rising from the photoreceptor during CO₂ laser beam treatment. Moreover, the molten mass accumulation forms beads of surface protruberance upon cooling to room ambient. Localized heating caused by a CO₂ laser also tends to distort or warp photoreceptor substrates. In addition, when heat-type laser beams are utilized, multiple passes are often required to control the removal of material from both marginal end regions of the imaging member. These multiple passes require complex equipment

and prolong the time required for material removal. Attempts to use of a YAG laser having a wavelength of about 1.06 micrometers to remove material from a photoreceptor merely heats the photoreceptor and discolors the charge generator layer. Lasers that ablate photoreceptor layers by heating also causes undesirable ripples to form in the photoreceptor. These ripples trap toner particles which, in turn, tend to agglomerate and form smears on the photoreceptor surface or form particulate deposits in background areas of final imaged copies. In addition, the ripples trap air which is heated during impulse heat-fuse welding process to the point where expansion of the air causes bubbles that weaken the final welded photoreceptor seam. The presence of small bubbles (that heat up and expand during welding) can produce a pronounced weakness in the welded seam, particularly when the overlap of the sheet ends is relatively small.

[0041] The puzzle cut ends of the present invention are formed by exposing a belt to a masked excimer laser. Excimer laser has a characteristic rectangular beam profile emission of about 3.0 cm x 1.5 cm and exhibits an uniform top hat like energy distribution. Excimer lasers take their name from the excited state dimmers from which lasing occurs. Currently, the most important excimer lasers are the rate-gas-halides such as ArF, KrF, XeCl, and XeF which produce intense UV radiation of distinctive wavelengths from 193 nm (ArF), 248 nm (KrF), 308 nm (XeCl), to 351 nm (XeF). Since the excimer molecules have short life-times that exist for only a few nanoseconds, they require a fast excitation process. The excimer lasers, however, have no or only weakly bound ground states and they imply high gain and high energy capabilities. Thus, in comparison to solid state lasers, excimer lasers are easier to operate. In commercial excimer laser technology, the excitation process is executed by a fast high pressure electrical discharge applied to a gas mixture which contains small amounts of a halogen and a rate gas, diluted in helium or neon buffer gas. This results in generation of short UV laser pulses leaving the discharge cavity in a beam of fairly low divergence and exhibiting a characteristic rectangular profile of approximately 3 cm x 1.5 cm which has a cross section of about 4.5 cm². No heat is generated by an excimer laser and it does not burn the substrate. Therefore, an excimer laser does not heat or otherwise adversely affect areas adjacent the laser path. This permits greater control during removal of material. Upon direct exposure, excimer lasers convert the photoreceptor materials to a gas by breaking down the molecular chains of polymeric components of the photoreceptor into smaller fragments. The excimer laser beam is pulsed during operation. Satisfactory results may be achieved when the pulse frequency is between about 50 Hz and about 500 Hz. Preferred pulse frequency ranges from about 100 Hz to about 300 Hz. The frequency of the pulse selected for any given set of sheet materials depends upon the speed of traverse, distance and power of the laser beam. For example, a slower laser beam traverse permits a lower pulse frequency to achieve the desired removal of belt material to form the trough. Typical traverse rates for a flexible electrophotographic imaging member sheet are between about 30 mm per second and about 0.5 mm per second.

[0042] Figure 8, represents a moment frozen in time of a first marginal end region 50 of a multi-layered, flexible electrophotographic imaging member 52 being traversed, in a direction from right to left, by a masked ultraviolet excimer laser beam 46, which is incident on second major exterior surface 56 along a first edge surface 58 of imaging member 52. Original excimer laser beam 40 is directed through a metal masking plate 42 having a rectangular opening 44 which removes the non uniform low energy edges from beam 40 thereby providing an emerging masked ultraviolet excimer laser beam 46 of even energy distribution for precise coating layer material displacement when directed toward second major exterior surface 56. Unlike infrared lasers, such as CO₂ and YAG lasers which produce intense thermal heating effects, exposure of imaging member 52 to high energy short wavelength UV radiation from masked ultraviolet excimer laser beam 46 can produce a number of important effects including: energy absorption by long chain polymer molecules to elevate these molecules to an electronic excitation state in the coating layers; chain scission of the polymer molecules into small molecular fragments; ablation removal of the molecular fragments away from the surface as a puff of gas, creating a total cutting through of the material layers adjacent first edge surface 58 of imaging member 52. In this manner, each masked excimer laser pulse displaces a thin layer of material 51 from imaging member 52 to precisely remove imaging member material in full accordance with the laser beam exposure profile of the mask to yield a pre-determined cutting pattern through the imaging member. The laser beam 40 is pulsed during the imaging member shaping operation. The frequency of the laser pulses is adjustable from only about a few pulses per second to about 300 Hz. Since each laser pulse occurs on an extremely brief time scale and provides only the energy for molecular excitation of the polymer coating, no heat is generated in the process to cause dimensional distortion or material melting to the imaging member 52. The masked ultraviolet excimer laser beam 46 traverses a portion of the imaging member web to create a cut-through 55. It is also important that original excimer laser beam 40 is masked to achieve sharp corners at the top and bottom of cut 55 formed during excimer laser ablation.

[0043] Any suitable masking plate material may be utilized. A typical masking plate 42 comprises a metal. Any suitable metal may be utilized. Typical metals include, for example, stainless steel, carbon steel, nickel, and the like. Further, with masked excimer laser beam 46 utilized in the process of this invention, no heat is generated and the components of electrophotographic imaging member 52 are not degraded by heating or burning. This also avoids heat distortion of areas adjacent the path of laser beam 46 and achieves greater control of the shape of the cut-through 55 created by masked ultraviolet excimer laser beam 46. Thus, masked ultraviolet excimer laser beam 46 utilized in this invention removes coating layers from marginal end region 50 of electrophotographic imaging member 52 with greater precision

to produce the desired cut-through 55 on electrophotographic imaging member 52.

[0044] Figure 9 shows the mask template 42 with a puzzle cut pattern aperture 44 formed therein to be employed for the imaging member cutting application described in the preceding Figure 8. In the embodiment, it is shown that the template has a template aperture in the form of a puzzle cut pattern; since the excimer laser emission has a uniform radiation energy area many times wider than the breadth of the puzzle cut pattern aperture in the mask template, the puzzle cut pattern may be easily and quickly generated as the excimer laser is transporting in a straight direction over the mask template which was positioned directly above and perpendicular to the two edges of an imaging member web. With this cutting strategy employed for a long imaging member sheet shall have a perfect matching male and female pairs for excellent mechanical interlocking. However, if desired this mask template may be split into the left half and the right half mask templates for individual creation of left and right ends puzzle cutting in an imaging member sheet.

[0045] The mask template of Figure 9 can also be used to form only one end at a time or be of any desirable pattern to form interlocking ends, depending upon the configuration of the template. When the pulsing excimer laser 40 traverses over the mask template 42 and across the full width of the belt, a matching pair of puzzle cut ends like that of the template aperture 44 is created without the introduction of heat.

[0046] As may be observed from the drawings, the puzzle cut pattern may take virtually any form, including that of nodes such as identical post or neck 14 and head or node 16 patterns of male 13 and female 15 interlocking portions as illustrated in Figure 2, or a more mushroom like shaped pattern having male portions 18 and 19 and female portions 21 and 23 as illustrated in Figure 3 as well as a dovetail pattern as illustrated in Figure 4. The puzzle cut pattern illustrated in Figure 5 has a plurality of male fingers 22 with interlocking teeth 24 and plurality of female fingers 26 which have recesses 28 to interlock with the teeth 24 when assembled. It is important that the interlocking elements all have curved mating elements to reduce the stress concentration between the interlocking elements and permit them to separate when traveling around curved members such as the rolls 12 of Figure 1. It has been found that with curved mating elements that the stress concentration is lower than with square corners where rather than the stress being uniformly distributed it is concentrated leading to possible failure.

[0047] It has been found that with curved mating elements that the stress concentration is lower than with square corners where rather than the stress being uniformly distributed it is concentrated leading to possible failure. The mechanical bonding, strength and flexibility of the bond should be capable of supporting a belt cycling of at least 500,000 cycles and the height differential between the seamed portion and the unseamed portion on each side of the seam about 0.001 inch and the seam have a tensile strength of at least 80% and preferably 90% of the parent belt material strength.

[0048] The following is a discussion of the interrelationship among the various belt and material parameters involved in the mechanical integrity of the seam.

The mechanical integrity of the seam was examined and analyzed for a number of configurations and in particular for the preferred configuration which involves nodes forming parts of a circle and interconnecting via a neck on the opposite side. To determine the deflection under loading conditions, each such node is treated as a beam fixed at the narrowest part of the neck joining the node to the base and the deflection of each tooth (node and neck) is calculated in terms of the orientation of the load relative to the beam. To assure that the seam will not come apart under load, it is imposed that the maximum deflection of each tooth, when the load, under worse conditions, is normal to the beam, would not exceed the thickness of the belt itself. Clearly, if the deflection of the tooth is in excess of the thickness of the belt then the seam will come apart. Under the above brief analysis, a master relationship connecting a material parameter M typical of the configuration with a geometric parameter G such that the belt will not come apart under loading.

(1)

$$M = \frac{1 - G}{\left(1 + \sqrt{4 - \frac{1}{G^2}}\right)^3}$$

In this relationship M is a dimensionless quantity given by

$$(2) \quad M = \frac{4NR^3}{Et^4}$$

and G represents the ratio

$$(3) \quad G = \frac{2R}{w}$$

where N is the total load per unit width (i.e. lbs/in.) acting on the belt, E is the modulus of elasticity of the belt material t, the thickness of the belt, R the radius of the circular node forming the seam, and w is the wave length of one whole period between two adjacent nodes. Equation (1) is a one-to-one relationship between the material parameter M and the geometric parameter G. Thus, given one of them we can find the other parameter. Furthermore, because of the dimensionless nature of these two parameters, a multitude of configurations are embodied in each pair of values satisfying equation (1), by virtue of the fact that there is an infinite number of combinations of the variables involved in that particular pair of values of M and G. Inspection of the geometry of the node shows that the structure is characterized by two main features: the shoulder, or that portion where there is interference between adjacent teeth, which supports the seam, and the neck of each tooth which represents its strength under loading. The size of the shoulder should be sufficient to insure mechanical integrity of the seam without making the neck too small as to weaken its strength. Table 1 below lists the various parameters for the identified belt characteristics. While all samples will function as noted above, a value of G of 0.6 is a good compromise. Many of the samples of course are impractical to implement relative to factors such as manufacturing ease, costs, stress tolerance, etc. Equation (3) shows that G can only vary between 1/2 and 1, the first value refers to the case when the shoulder is zero, and the second value pertains to the case when the neck of the tooth is zero and the node has no strength. Once either M or G is known the entire configuration becomes determinate with the help of the above equations and other standard geometric relationships. Measurements on actual belts have generally confirmed the above analysis.

To illustrate the solution methodology, suppose a belt material of Young's modulus $E=5 \times 10^5$ psi and thickness $t=0.004$ " is subjected to a tension $N=2.0$ lb./in. of belt width. H is the perpendicular height between centers of one node or one side of the seam and a node on the other side of the seam. The solution possibilities are given in Table 1 below such that the seam will not come apart. If a value $G=0.6$ is chosen as a compromise between seam integrity and node strength, we find

Node Diameter	D = 0.448 mm
Period	w = 0.747 mm
Neck Width	g = 0.299 mm

Node Height		H = 0.69696			
G	1/M	D	W	g	H
.5000	2.000	1.0160	2.0320	1.0160	1.0160
.5100	5.5296	.7239	1.4194	.6955	.8665
.5200	7.7482	.6469	1.2440	.5971	.8246
.5300	9.7913	.5984	1.1290	.5306	.7968
.5400	11.7592	.5629	1.0424	.4795	.7755
.5500	13.6903	.5351	.9729	.4378	.7580
.5600	15.6054	.5122	.9147	.4025	.7429
.5700	17.5179	.4929	.8647	.3718	.7295
.5800	19.4383	.4761	.8208	.3448	.7174
.5900	21.3751	.4612	.7818	.3205	.7061
.6000	23.3363	.4479	.7466	.2986	.6956
.6100	25.3292	.4359	.7146	.2787	.6856
.6200	27.3614	.4248	.6852	.2604	.6760
.6300	29.4406	.4146	.6580	.2435	.6668
.6400	31.5747	.4050	.6328	.2278	.6578
.6500	33.7722	.3960	.6093	.2132	.6491
.6600	36.0424	.3875	.5872	.1996	.6405
.6700	38.3950	.3794	.5663	.1869	.6320
.6800	40.8411	.3717	.5466	.1749	.6236
.6900	43.3927	.3643	.5279	.1637	.6153
.7000	46.0632	.3571	.5101	.1530	.6070

EP 0 928 907 A1

(continued)

	Node Height		H = 0.69696			
	G	1/M	D	W	g	H
5	.7200	51.8235	.3433	.4769	.1335	.5904
	.7300	54.9497	.3367	.4612	.1245	.5820
	.7400	58.2687	.3302	.4462	.1160	.5736
	.7500	61.8060	.3238	.4317	.1079	.5651
10	.7600	65.5913	.3174	.4176	.1002	.5565
	.7700	69.6594	.3111	.4040	.0929	.5477
	.7800	74.0510	.3048	.3908	.0860	.5388
	.7900	78.8149	.2986	.3779	.0794	.5297
15	.8000	84.0090	.2923	.3653	.0731	.5204
	.8100	89.7035	.2860	.3530	.0671	.5109
	.8200	95.9840	.2796	.3410	.0614	.5012
	.8300	102.9563	.2731	.3291	.0559	.4911
20	.8400	110.7522	.2666	.3173	.0508	.4807
	.8500	119.5388	.2599	.3057	.0459	.4700
	.8600	129.5306	.2530	.2942	.0412	.4588
	.8700	141.0081	.2459	.2827	.0367	.4472
25	.8800	154.3451	.2386	.2712	.0325	.4350
	.8900	170.0512	.2311	.2596	.0286	.4222
	.9000	188.8397	.2231	.2479	.0248	.4086
	.9100	211.7410	.2148	.2360	.0212	.3942
30	.9200	240.2999	.2059	.2238	.0179	.3787
	.9300	276.9445	.1964	.2112	.0148	.3620
	.9400	325.7211	.1860	.1979	.0119	.3436
	.9500	393.9129	.1746	.1838	.0092	.3231
35	.9600	496.0860	.1617	.1684	.0067	.2997
	.9700	666.2290	.1466	.1511	.0045	.2722
	.9800	1006.3020	.1277	.1303	.0026	.2376
	.9900	2026.1140	.1012	.1022	.0010	.1885

N, b/in = 2.0

E, psi = 500000

t, in = .004

[0049] To minimize any time out or nonfunctional area of the belt it is desirable to have the seam width be as narrow as possible. Further, this enables the seam to be indexed so that it does not participate in belt functionality such as the formation and transfer of a toner or developer image. Typically, the seam is from about 1 mm to about 3 mm wide.

[0050] With reference to the embodiment illustrated in Figure 2, the seam may be typically of the order of one inch wide on a belt which is 16 to 18 inches long depending on roll diameter, material modulus or other parameters and the post and head pattern may be formed from a male/female punch cut with each end being cut separately and subsequently being joined to form the seam with a roller similar to that used as a wall paper seamer rolled over the seam by hand to complete the interlocking nature of the puzzle cut pattern.

[0051] The two ends of the belt material are joined by physically placing them together in interlocking relationship. This may require the application of pressure to properly seat or mate the interlocking elements. The adhesive material may be the same or it may be different from the material from which the belt was fabricated and may be selected from those materials previously discussed. Typically, it is a heat sensitive thermoplastic or thermoset material. It may be either chemically, and/or physically bound to the belt material. The chemical and/or physical bond between the adhesive and the belt material may also be formed by the application of heat and/or pressure after the adhesive has been applied. In a particular application impulse welding may be applied wherein heat and pressure are simultaneously applied to at least soften the belt material and the compatible adhesive material 17 (see Figure 7) so that it fills the kerf and forms an adhesive bond with the belt material. In this regard, it is important that the heat applied does not exceed that which

would both form the seam and break it by melting it or decomposing it. Other heat sources include conventional heated rolls, a simple heated iron, ultrasonic welding or a two roll heated nip providing a combination of heat and pressure.

[0052] Preferably, the adhesive material applied is of a thickness to provide a quantity of adhesive to fill the kerf spaces between the two sides of the puzzle cut seam member. In this regard it should also be noted that it may be possible to first apply the heat to, the seam of the belt material and the adhesive and subsequently apply pressure while it is still in a softened condition to force the softened adhesive into kerf or the spaces between the two sides of the puzzle cut seam members. The pressure applied should be sufficient to fill the kerf and to minimize the thickness of any bonded joint. While this process clearly provides a physical bonding between material of the belt seam and the adhesive material, it may also provide a chemical bond. A typical example of this would be one wherein the belt material is a polyimide and the adhesive is a polyimide.

[0053] Following fabrication, the belt may be finished by way of buffing or sanding and further, may have an overcoating applied, typically, of a thickness of 0.001 to 0.003 inch in thickness which can be initially applied to the unseamed belt, the belt seam and the seamed area filled from the back of the belt to maintain the uniformity of the functional surface. Preferably, and by far the most economical matter is to form the belt seam initially and then apply the desired overcoating.

[0054] The seamed belt according to the present invention may be fabricated in an environmentally acceptable manner in that no solvents are required. The adhesive may be applied to the belt in a suitable manner, such as by being applied from a tubular applicator by squeezing or pushing or being applied by a spatula. It may be applied on one or both sides of the kerf or voided area and is preferably smoothed on it's surface to provide a smooth surface in the seam area of the belt.

EXAMPLE 1

[0055] Using a die cutter, a one inch wide polyimide material was mechanically cut to provide a radius of the nodes of about 0.5 mm and the center to center spacing of about 0.70 mm. The ends of the strip of the one inch width polyimide material were then interlocked and rolled with the roller to flatten the seam. A thermoplastic polyamide web material was placed on the lower jaw of an impulse welder Vertrod Corp. Model No. 24H/HT1/4. The previously joined seam was then centered over the webbing material, heat at approximately 350° F and light pressure were then applied to melt the polyamide web material into the seamed area for approximately 20 seconds. With the seam remaining on the lower jaw of the impulse welder, both sides of the seam were then masked with conventional masking tape, a bead of a polyimide adhesive was squeezegeed into the area formed by the masking tape and permitted to flash to release solvent for about 15 minutes after which the masking is removed. The impulse welder is once again clamped again and the seam receives two cycles of 350° F heat for 35 seconds. The seam remained in the impulse welder for 30 seconds before it was removed and postcured at 400° F for 2 hours and then room temperature dwell for at least 12 hours. Fourteen, 12 inch long belts were tested in the flex tester and all had flexing cycles exceeding 750,000 with 9 samples exceeding one million cycles. Of the nine belts, which flexed for over a million cycles, the test was discontinued without any of the belts failing. The samples were tested in a flex tester using two pounds in loading, 17 inch per second process speed around the 25 mm drum rollers.

[0056] Turning now to Figure 10, which shows a front view of the die press assembly used to cut the patterned ends of the belt. Die 102 is supported by die retainer plate 106. Punch 104 is supported over the die 102 by punch retainer plate 108 and punch assembly retainer 120. A stripper 114 surrounds the punch 104, there being a very small clearance between the punch and stripper. Stripper 114 has a puzzle cut pattern which is complementary with the punch puzzle cut pattern so that the stripper assists in locating the punch with respect to the die. The stripper is fixed to die 102 so that a stock gap exists for the belt material 111 to pass between the stripper and die. The stock gap is formed by shims 140 (see Figure 11) between the stripper and the die. The stripper 114, die 102 and die retainer plate 106 are fixed together and remain stationary during the belt cutting process.

[0057] Timing blocks 112 are mounted to both ends of punch retaining plate 108 and are located above stripper 114. Timing blocks 112 cooperate to keep the punch assembly level; when the first timing block hits stripper 114 this causes the punch assembly to level out and when the other timing block hits the stripper, the direction of punch assembly is reversed (discussed below).

[0058] Guide posts 116 pass through punch retainer plate 108 and die retainer 106 and assist in keeping all of the punch and die members properly aligned. Punch return assembly 118 connects the punch retainer plate 108 and die retainer 106 and returns the punch to its ready to cut position once the cutting force is removed. Punch assembly retainer 120 supports punch retainer plate 108, punch 104 and timing blocks 112; punch assembly retainer 120, punch plate 108, timing blocks 112 and punch 104 being fixed with respect to each other. Punch assembly retainer 120 is a solid piece of metal and distributes the cutting force along the full length of punch retaining plate 108.

[0059] At the top center of the punch assembly retainer is force receiving surface 122. Above force receiving surface 122 is force generating assembly 124 having a force generating surface 126, a cylinder travel gap 128 being formed

between the two surfaces when the force generating assembly is in the retracted position. The force generating assembly may be a hydraulic press or any equivalent press which can generate sufficient force to cut the belt material. Force generating assembly 124 provides a downward force with force generating surface 124 contacting force receiving surface 122 which supplies the cutting force to the punch assembly until both timing blocks 112 contact stripper 114 (as shown). At this time the force generating assembly force direction is reversed and the cutting force removed. Punch assembly 120 moves upward due to the upward force of spring 121 of punch return assembly 118, the top of the bolt 119 limiting the upward movement of the punch.

[0060] Force generating assembly 124 is supported independently of the punch and die members. Force generating assembly horizontal support 130 and vertical supports 132 are attached to die table 140. Vertical supports 132 have a foot member 134. Die retainer 106 supports all of the punch members and die members and is also attached to die table 140. As shown, die retainer 106 has cut out portions 136 on its underside with foot members 132 captured in the cut out portions. This configuration insures that force generator assembly horizontal support 140 will remain stationary with respect to the die when the cutting force is supplied is supplied by force generating assembly 124.

[0061] Rather than having the punch assembly attached to the force generating member as is usual for die presses, the punch members are fixed to the die members by punch return assembly 118. The punch return assembly 118 shown has a plurality of punch return assembly bolts 119 and punch return assembly springs 121, which connect the punch and die assemblies and bias the punch assembly towards the force generating assembly, away from the die assembly, when the cutting force is removed. This configuration allows the punch and die to remain in close proximity and properly aligned with one another. Any misalignment of the punch and die would result in catastrophic failure when the next punch force is applied.

[0062] An exploded view of the punch and die assemblies is shown in Figure 11. The cutting assembly 100 is formed of a die 102 and punch 104. The die and punch have complementary surfaces which form the puzzle cut pattern when the cutting operation is performed. Die 102 has two die cutting ends 160 and 161 and two die cutting edges 162 and 163 and punch 104 has two punch cutting ends 164 and another end (not shown) and two punch cutting edges 166 and another edge (not shown). Die cutting end 160 and punch cutting end 164 interact to form the puzzle cut pattern at the first end of a belt and die cutting end 161 and the other punch cutting end interact to form a complementary puzzle cut pattern for the second end of a belt with die cutting edge 162 and punch cutting edge 166 interacting to form a first side of the belt and die cutting edge 163 and punch cutting edge (not shown) interacting to form a second side of the belt. There is a very small clearance between punch cutting edges and the die cutting edges to insure proper cutting tolerances of belt material 111. A stock gap is formed between stripper 114 and die 102 surfaces with shims 140 spacing the two members for the desired stock gap width.

[0063] Stripper 114 holds the cut belt material in place as the punch returns to its pre-cut position, thus performing its stripping function. In operation, the die assembly cuts the first end of the belt at the same time it cuts the second end of the belt. The belt material is fed through the stock gap in any known manner, for example as a mechanized or hand placement process, the length of the belt being determined by the distance between the first puzzle cut end and the second puzzle cut end of the punching template.

[0064] The first feature that required development in forming the extremely accurate punch and die cutting edges was the proper steel and heat treatment process to maintain less than .04% dimensional change and no warpage when wire cut or ground. After several experiments, the optimum material and process was D-2 steel, .5 inch thick die plates hardened to R/C 57 and drawn three times at 1875 Fahrenheit. After hardening, the plates were cryogenically treated to -120 Fahrenheit. Then two more draw operations at 920F and 950F were performed. A cut relief 104 was incorporated in the center of the die to relieve stress prior to hardening. The treated material was then cut using an EDM technique, the punch 102 and die 104 plates being formed separately. Four cutting passes were required to maintain tolerances so that the very small nodes and even smaller spacing tolerances required were produced in the finished punch and die. The last cutting pass was a skimming pass of .0002 inches. The length of the die depends upon the desired belt width. The belt width can be as much as 60 inches using the drawing and EDM cutting techniques outlined above.

EXAMPLE 2

[0065] The particular configuration of the puzzle cut with the rounded puzzle cut pattern will be discussed (see Figure 7 and 8), however any desired pattern could be formed with the appropriate punch and die pattern. The approximate clearance between the punch and die patterned edges is .0002 inches, the punch and stripper clearance is .0001 inches, the clearances being measured on each side of the punch and die. The node diameter was .5 mm and the kerf dimension was 25 microns. The punch assembly is returned approximately .100 inches above the belt material after the cut is made. The punch and die cutting edges may be configured so that the seam is at a slight skew with respect to a 90 degree straight edge belt, which increases the integrity of the seam. The belt material used may be any material described above, for example a photoreceptor or Mylar. The length of the puzzle cut pattern punch cutting ends is 18 inches and the distance between punch cutting ends is 3 feet. Using the above shapes, tolerances and materials, a

"seamless", i.e. a belt which essentially performs as a seamless belt, puzzle cut transfer belt was produced.

Claims

1. A method of making an endless flexible seamed belt from belt material stock comprising:

positioning a template above the belt material stock;
applying a cutting force to the template to form a first patterned end and a second patterned end on the belt stock material; and
removing the cutting force, wherein the first and second patterned ends of the belt are cut in a puzzle cut pattern with mutually mating elements which fit together to form a seam when joined mechanically to enable the endless flexible seamed belt to essentially function as an endless belt having a substantially uniform thickness.

2. The method of making an endless flexible seamed belt as claimed in claim 1, wherein the cutting force is an excimer laser.

3. The method of making an endless flexible seamed belt as claimed in claim 2, wherein the template is a metal plate with a template aperture through which the excimer laser passes to form the first and second patterned ends on the belt material.

4. The method of making an endless flexible seamed belt as claimed in claim 3, wherein a first end of one belt and the second end of another belt are formed in the same cutting force application step.

5. The method of making an endless flexible seamed belt as claimed in claim 1, wherein the template is a punch assembly with a die assembly associated therewith, the punch assembly including a punch with a first punch cutting end having a first punch pattern and a second punch cutting end having a second punch pattern and the die assembly including a die with a first die cutting end having a first die pattern that is complementary to the first punch pattern and a second die cutting end having a second die pattern that is complementary to the second punch pattern; and

the cutting force is applied by a force generating assembly to a force receiving surface on the punch assembly so that the die and punch cut the belt material to form a first patterned end on a first end of the belt and a second patterned end formed on a second end of the belt.

6. An apparatus for producing an endless flexible seamed belt from belt material stock comprising;

a template with a puzzle cut pattern formed thereon positioned above the belt material stock;
a cutting force applied to the template to form a first patterned end and a second patterned end on the belt stock material, wherein the first and second patterned ends of the belt are cut in a puzzle cut pattern with mutually mating elements which fit together to form a seam when joined mechanically to enable the endless flexible seamed belt to essentially function as an endless belt having a substantially uniform thickness.

7. The apparatus for producing an endless flexible seamed belt as claimed in claim 6, wherein the cutting force is an excimer laser and the template has a template aperture through which the excimer laser passes prior to being absorbed by the belt material to form the puzzle cut pattern.

8. The apparatus for producing an endless flexible seamed belt as claimed in claim 6, wherein the template is a punch assembly including a punch with a first punch cutting end having a first punch pattern and a second punch cutting end having a second punch cutting pattern;

a die assembly including a die with a first die cutting end having a first die pattern which is complementary to the first punch pattern and a second die pattern which is complementary to the second punch pattern;

the cutting force is generated by a force generating assembly in a cutting operation in which the punch and die cut the belt material.

9. An endless flexible seamed belt made by an apparatus comprising:

EP 0 928 907 A1

a template with a puzzle cut pattern formed thereon positioned above the belt material stock;

a cutting force applied to the template to form a first patterned end and a second patterned end on the belt stock material, wherein the first and second patterned ends of the belt are cut in a puzzle cut pattern with mutually mating elements which fit together to form a seam when joined mechanically to enable the endless flexible seamed belt to essentially function as an endless belt having a substantially uniform thickness.

10. The endless flexible seamed belt as claimed in claim 10, wherein the cutting force applied to the template is an excimer laser and the template has a template aperture through which the excimer laser passes prior to being absorbed by the belt material to form the puzzle cut pattern.

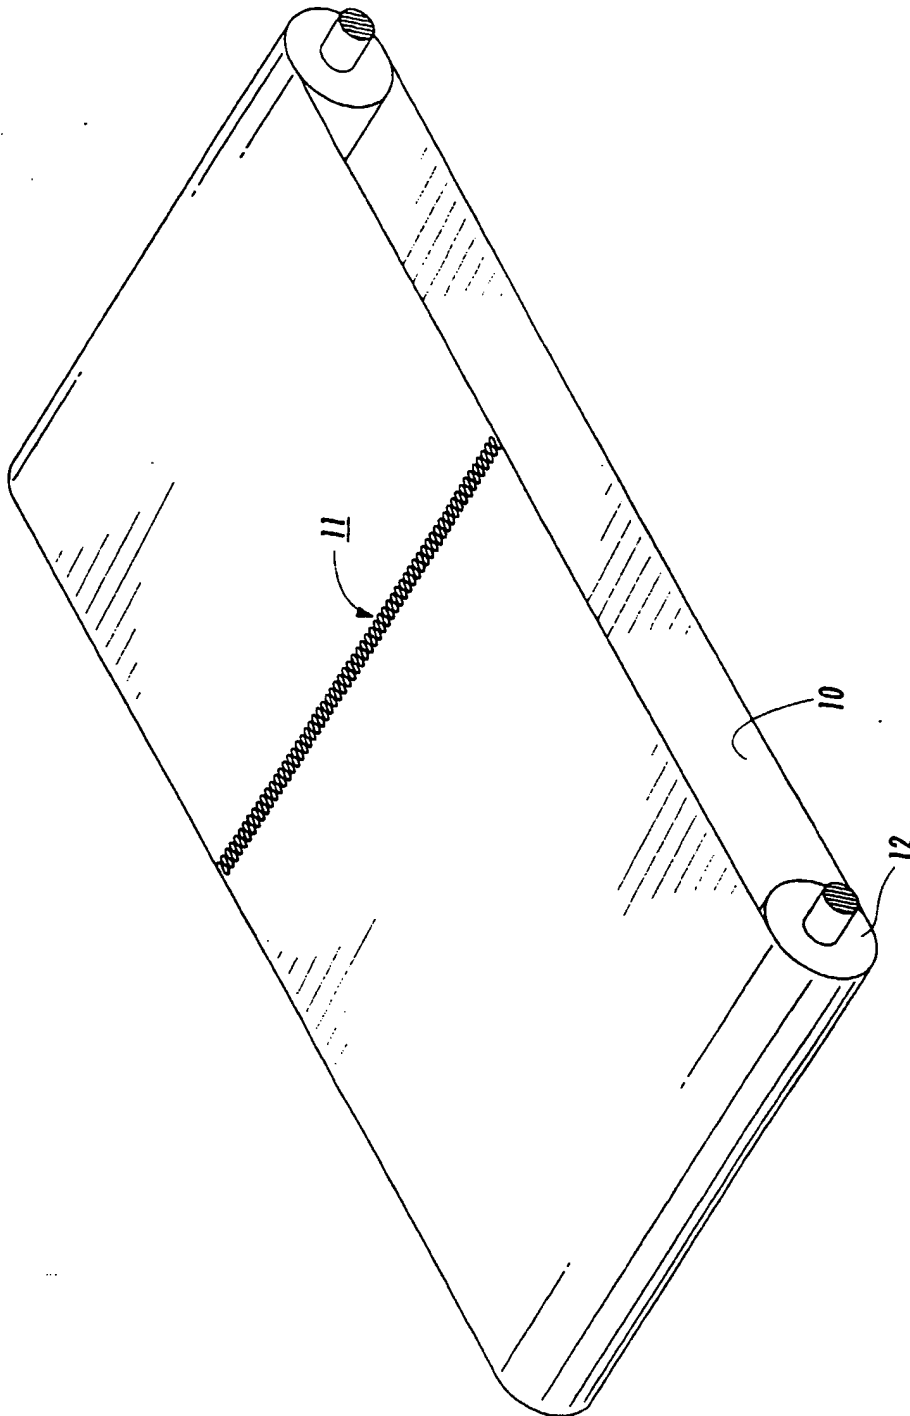


FIG. 1

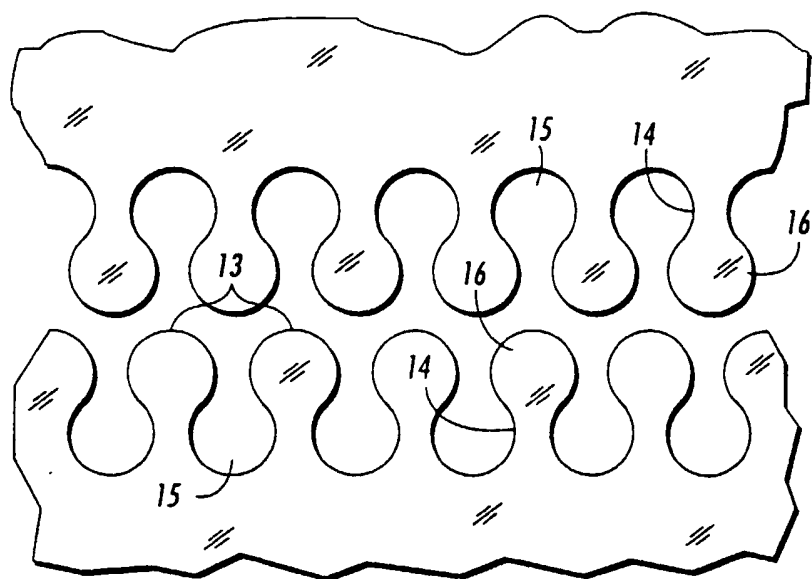


FIG. 2

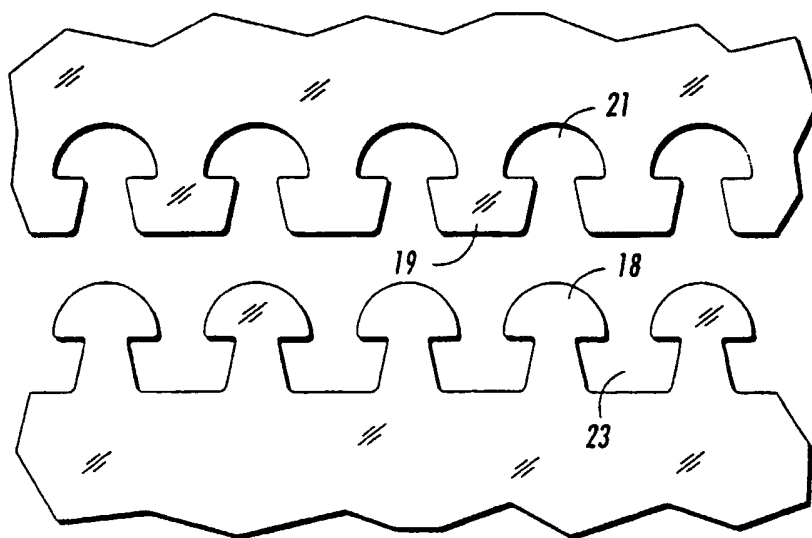


FIG. 3

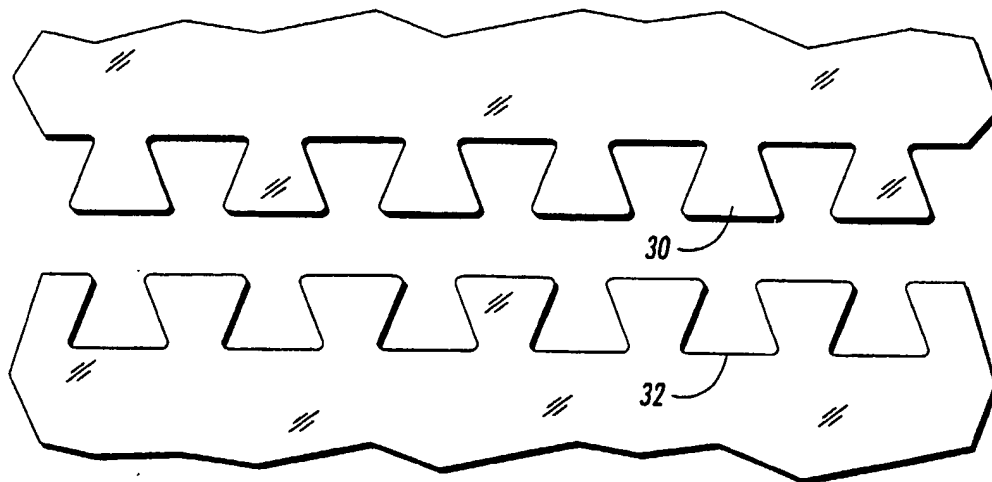


FIG. 4

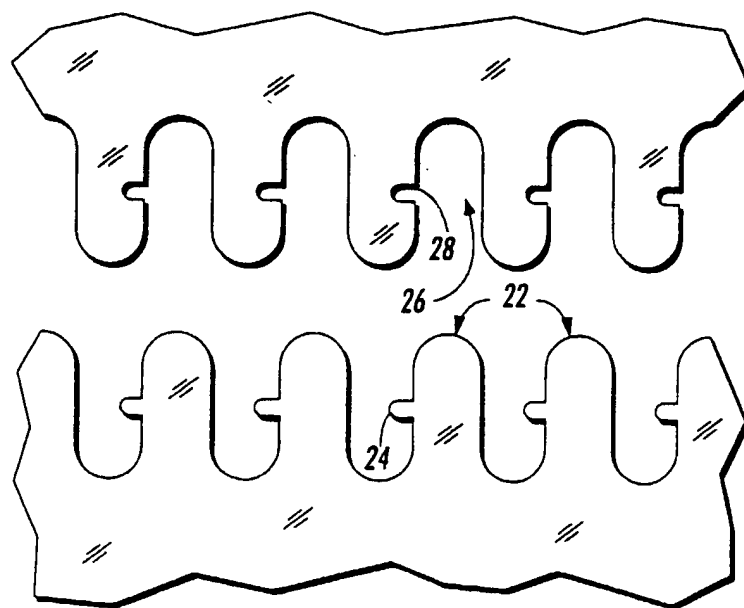


FIG. 5

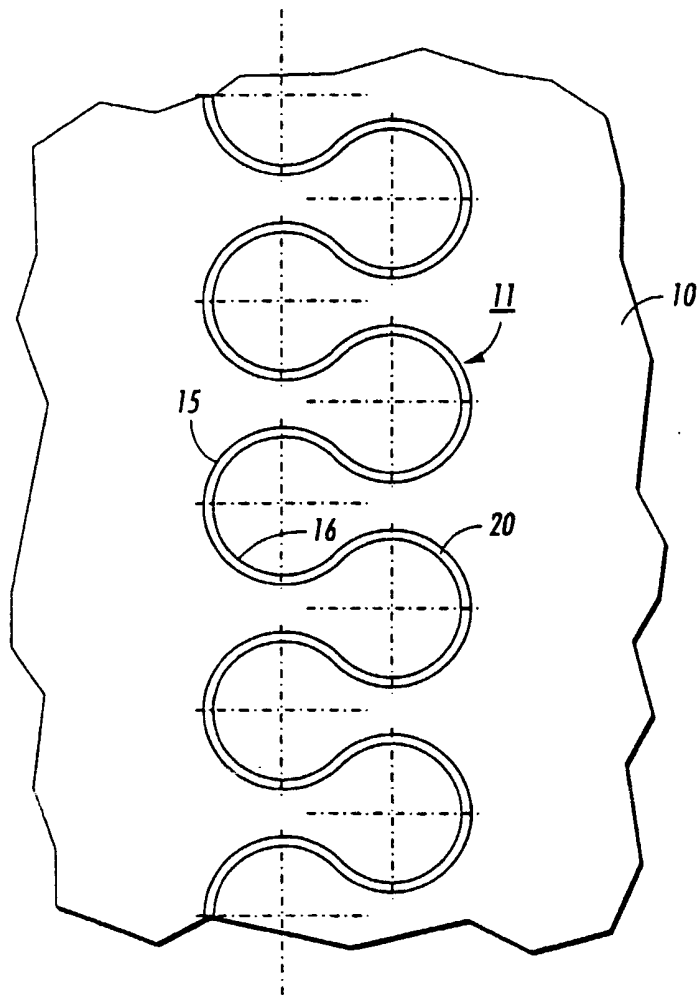


FIG. 6

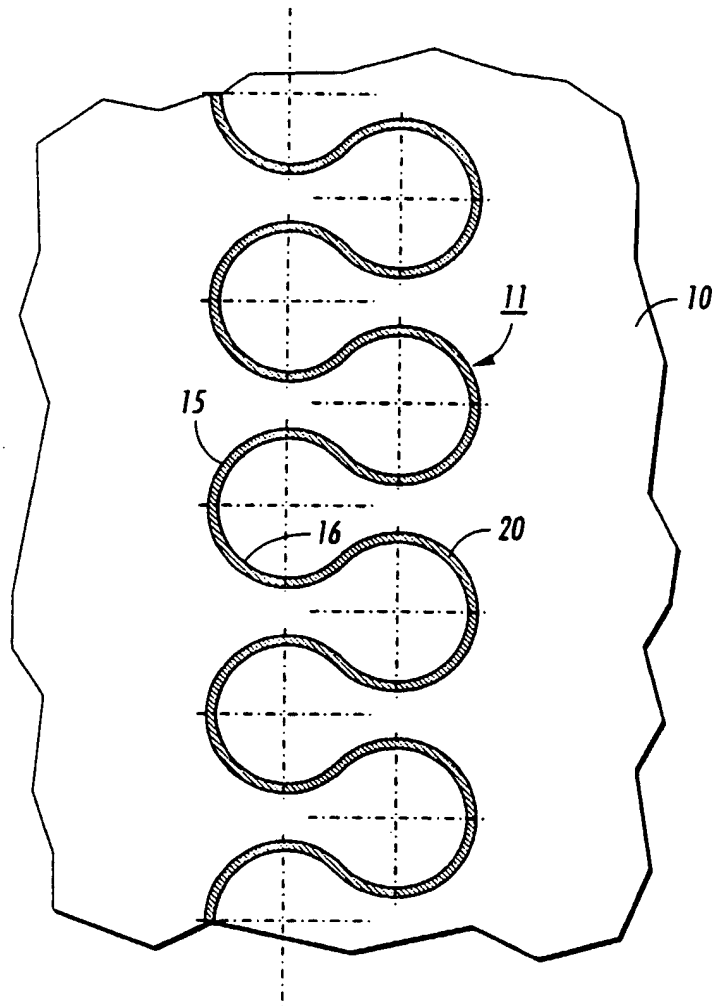


FIG. 7

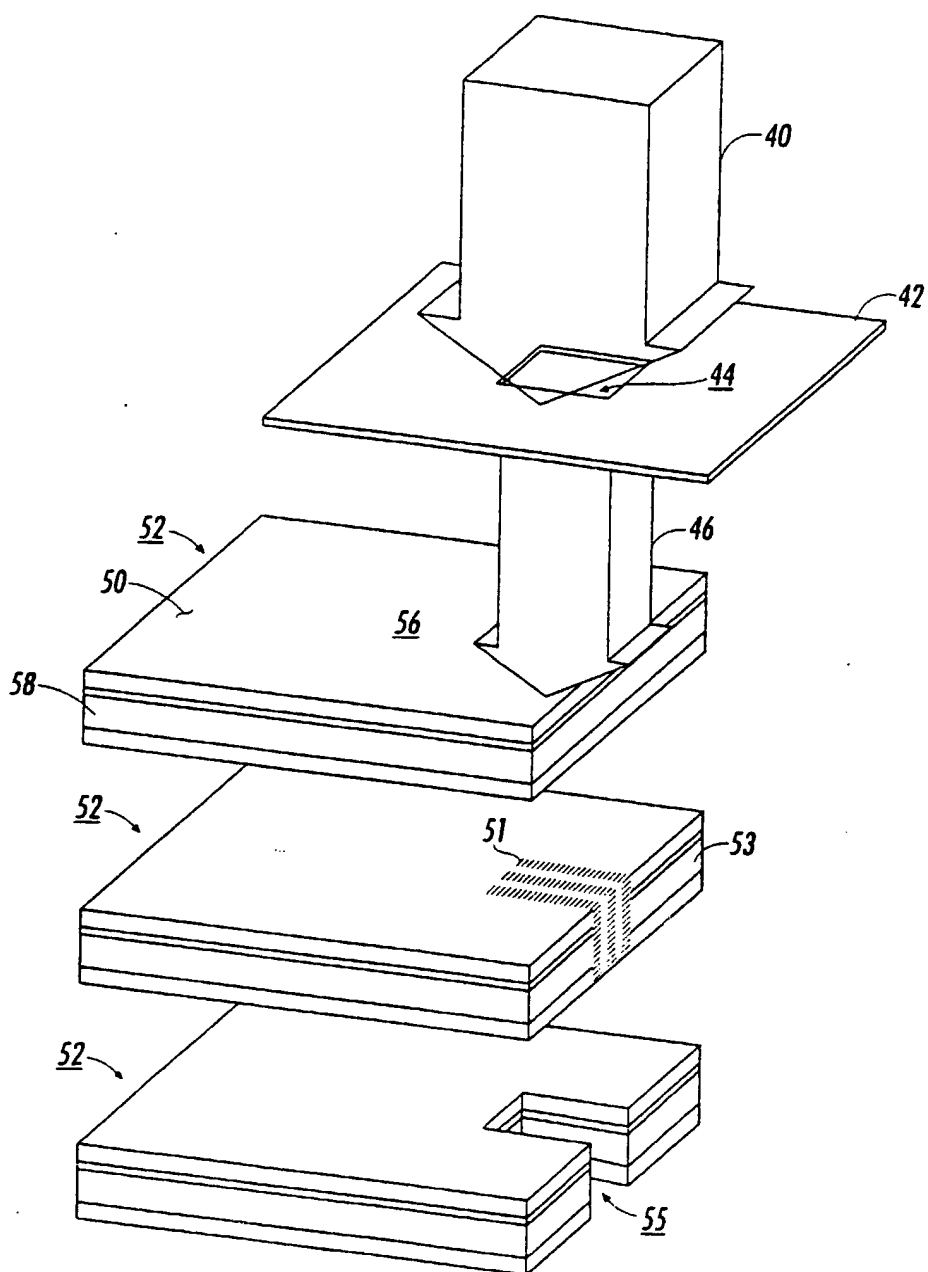


FIG. 8

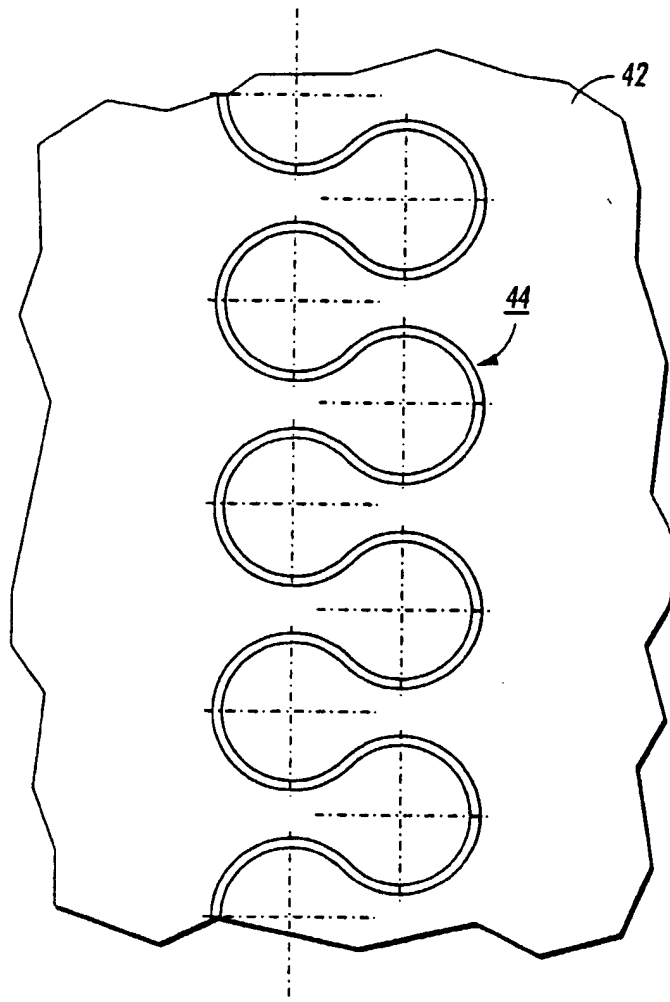


FIG. 9

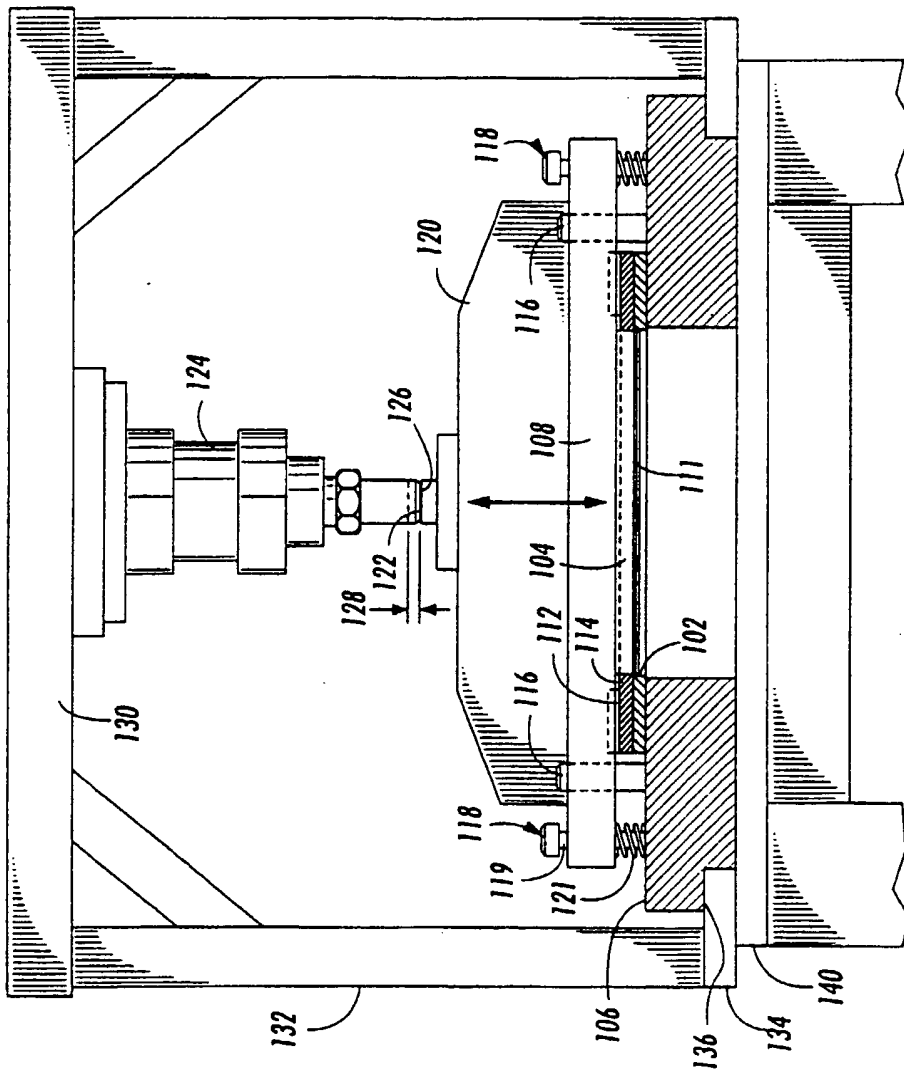


FIG. 10

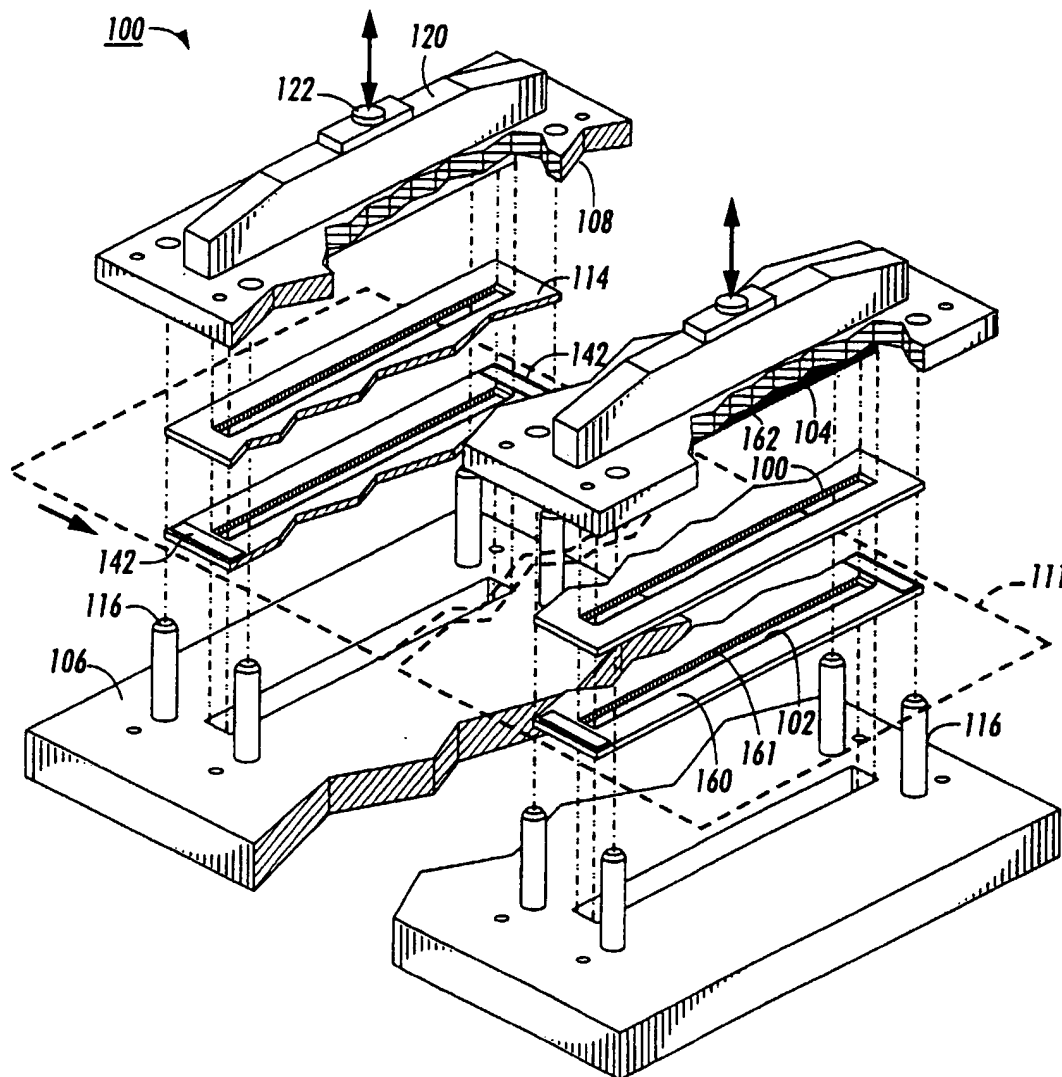


FIG. 11



European Patent
Office

EUROPEAN SEARCH REPORT

Application Number

EP 99 10 0191

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int.Cl.6)
X	US 1 362 604 A (CZARAN) 21 December 1920	1,5,6,8,9	F16G3/10
A	* page 1, line 32 - line 90; figures 1-4 *	4	
A,D	US 5 688 355 A (YU) 18 November 1997	1-3,6,7,9,10	
	* column 18, line 49 - column 13, line 53; figure 5 *		
A	US 5 487 707 A (SHARF) 30 January 1996	1,2,6,9	
	* column 6, line 19 - line 29; figures 1-7 *		
A,D	US 2 461 859 A (VASSELLI) 15 February 1949		
A,D	US 2 792 318 A (WELCH) 14 May 1957		
A,D	US 4 878 985 A (THOMSEN) 7 November 1989		
A,D	US 5 286 586 A (FOLEY) 15 February 1994		TECHNICAL FIELDS SEARCHED (Int.Cl.6)
A,D	US 4 624 126 A (AVILA) 25 November 1986		F16G
A,D	US 4 265 990 A (STOLKA) 5 May 1981		G03G
The present search report has been drawn up for all claims			
Place of search		Date of completion of the search	Examiner
THE HAGUE		15 April 1999	Baron, C
CATEGORY OF CITED DOCUMENTS			
<p>X : particularly relevant if taken alone</p> <p>Y : particularly relevant if combined with another document of the same category</p> <p>A : technological background</p> <p>O : non-written disclosure</p> <p>P : intermediate document</p> <p>T : theory or principle underlying the invention</p> <p>E : earlier patent document, but published on, or after the filing date</p> <p>D : document cited in the application</p> <p>L : document cited for other reasons</p> <p>& : member of the same patent family, corresponding document</p>			

**ANNEX TO THE EUROPEAN SEARCH REPORT
ON EUROPEAN PATENT APPLICATION NO.**

EP 99 10 0191

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report. The members are as contained in the European Patent Office EDP file on
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

15-04-1999

Patent document cited in search report		Publication date	Patent family member(s)		Publication date
US 1362604	A	21-12-1920	NONE		
US 5688355	A	18-11-1997	NONE		
US 5487707	A	30-01-1996	JP	8072164 A	19-03-1996
US 2461859	A	15-02-1949	NONE		
US 2792318	A	14-05-1957	NONE		
US 4878985	A	07-11-1989	JP	2080138 C	09-08-1996
			JP	7119070 B	20-12-1995
			JP	63249632 A	17-10-1988
			US	4838964 A	13-06-1989
US 5286586	A	15-02-1994	JP	5278144 A	26-10-1993
US 4624126	A	25-11-1986	NONE		
US 4265990	A	05-05-1981	US	4346158 A	24-08-1982
			BR	7705593 A	06-06-1978
			CA	1104866 A	14-07-1981
			DE	2734990 A	09-03-1978
			FR	2363134 A	24-03-1978
			GB	1577237 A	22-10-1980
			JP	1235533 C	17-10-1984
			JP	53027033 A	13-03-1978
			JP	59009049 B	29-02-1984
			MX	171443 B	26-10-1993
			NL	7709279 A,C	27-02-1978
			SU	1378794 A	28-02-1988

THIS PAGE BLANK (USPTO)